


ZAWIESIA LINOWE GROMMET wg PN-EN 13414-3

Zawiesia linowe jednocięgnowe grommet
Konstrukcja splotu : 6x36+FC

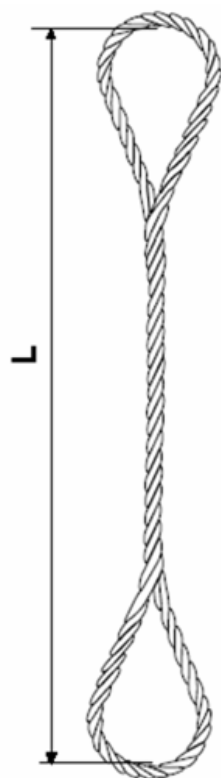

Średnica liny [mm]	Dopuszczalne obciążenie robocze [t]	
	Przy kącie 0°	Przy obciążeniu
24	3,35	2,65
27	4,25	3,50
30	5,50	4,50
33	7,00	5,50
36	8,00	6,50
39	9,50	7,50
42	11,0	9,00
48	14,5	11,5
54	18,0	14,5
60	22,5	18,0
66	28,0	22,0
72	34,0	27,0
78	41,0	33,0
84	49,0	39,0
90	58,0	47,0
96	68,0	55,0
102	79,0	64,0
108	92,0	74,0
114	106	85,0
120	122	97,0
126	139	111
132	158	127
144	204	163
150	230	185
156	250	200
162	270	220
168	290	235
174	315	250

Średnica liny [mm]	Dopuszczalne obciążenie robocze [t]	
	Przy kącie 0°	Przy obciążeniu
180	335	270
192	410	330
204	460	365
216	510	405
228	555	445
240	610	490
252	665	530
264	720	580
276	780	625
288	840	675
300	900	725
312	970	775
336	1 100	885
360	1 250	1 000
384	1 400	1 100
408	1 550	1 250
432	1 700	1 400
456	1 880	1 500
480	2 050	1 650
504	2 250	1 800
528	2 450	1 950
552	2 600	2 100
576	2 800	2 250
600	3 000	2 400
624	3200	2 550
648	3 400	2 750
672	3 650	2 900
696	3 850	3 100

ZAWIESIA LINOWE GROMMET wg PN-EN 13414-3

Zawiesia linowe o obwodzie zamkniętym grommet


Konstrukcja splotu : 6x36+FC



Średnica liny [mm]	Dopuszczalne obciążenie robocze [t]	
	Przy kącie 0°	Przy obwiązaniu
24	8,25	6,5
27	10,5	8,5
30	11,5	9,0
33	14,0	11,0
36	16,5	13,0
39	19,5	15,5
42	22,5	18,0
48	30,0	23,5
54	37,5	30,0
60	46,0	37,0

Zawiesia linowe o obwodzie zamkniętym grommet

Konstrukcja splotu : 6x36+IWRC

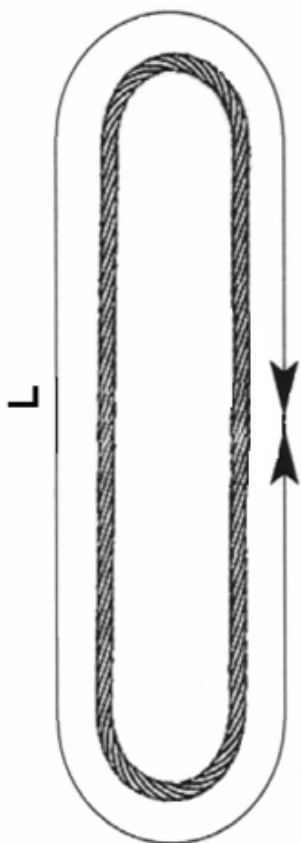

Średnica liny [mm]	Dopuszczalne obciążenie robocze [t]	
	Przy kącie 0°	Przy obwiązaniu
24	9,00	7,00
27	11,5	9,00
30	14,0	11,0
33	17,0	13,5
36	20,0	16,0
39	23,5	19,0
42	27,0	21,5
48	35,5	28,5
54	45,0	36,0
60	55,5	44,5
66	69,0	55,0
72	84,0	68,0
78	102	81,0
84	121	97,0
90	144	115
96	168	135
102	196	157
108	227	182
114	262	210
120	300	240
126	344	275
132	392	314
144	505	404
156	700	-
162	750	-

Średnica liny [mm]	Dopuszczalne obciążenie robocze [t]	
	Przy kącie 0°	Przy obwiązaniu
168	800	-
174	850	-
180	900	-
192	1 000	-
216	1 250	-
240	1 500	-
258	1 750	-
282	2 000	-
300	2 250	-
318	2 500	-
354	3 000	-
384	3 500	-
414	4 000	-
444	4 500	-
474	5 000	-
504	5 500	-
528	6 000	-
552	6 500	-
576	7 000	-
600	7 500	-
624	8 000	-
648	8 500	-
672	9 000	-
696	9 500	-